



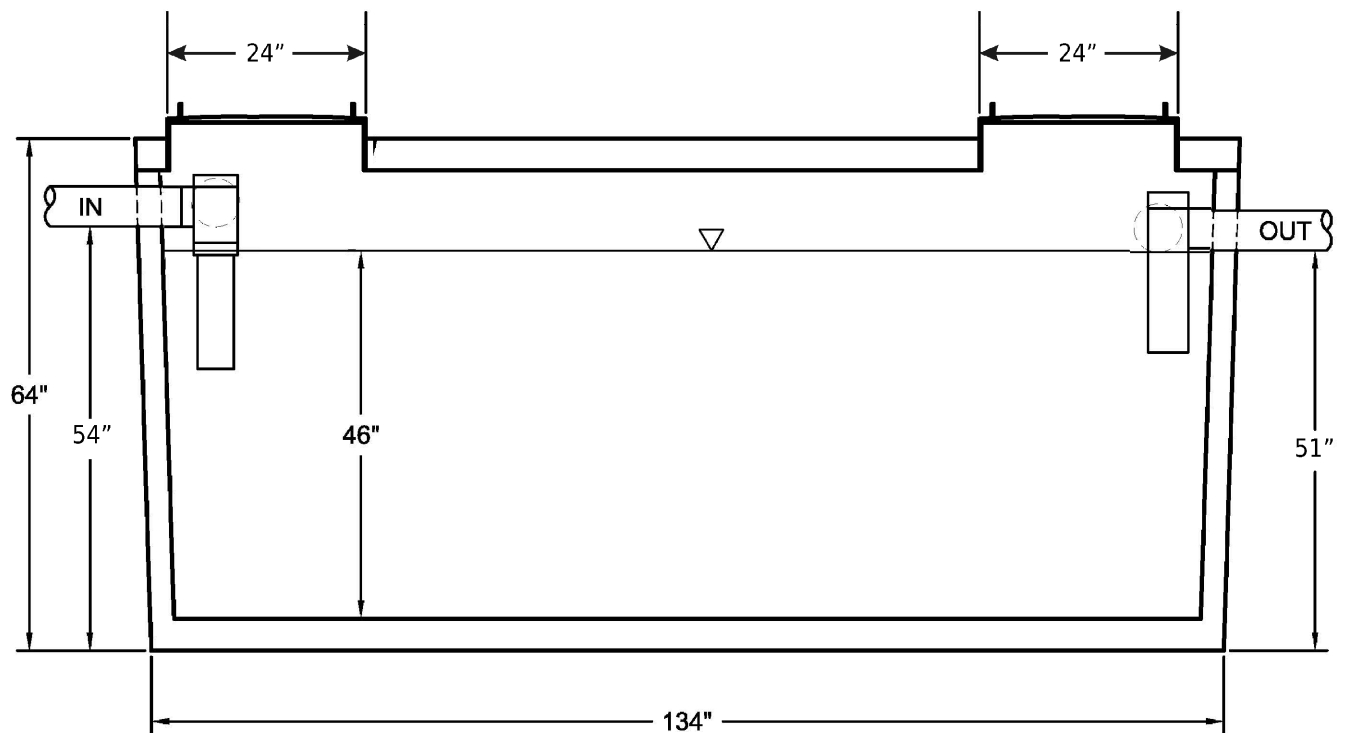

MONTANA PRE-CAST
CONCRETE LLC

1500 GALLON SEPTIC TANK

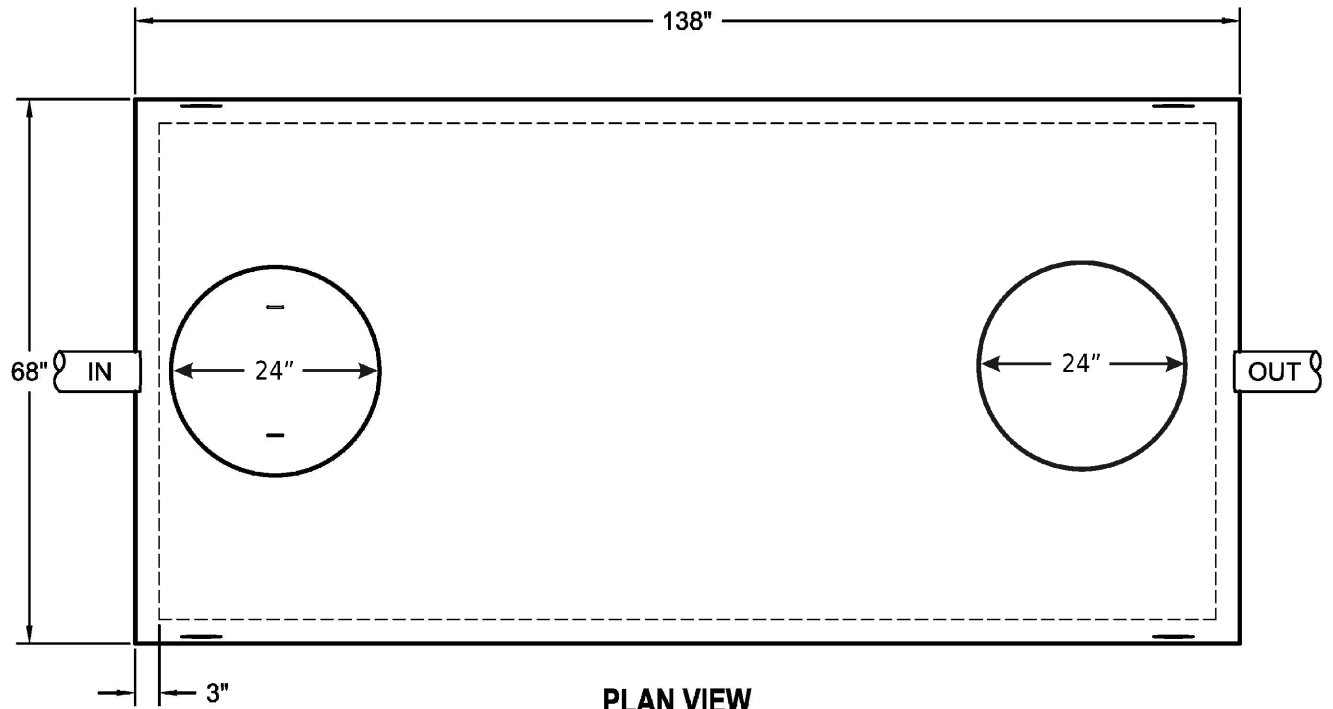

DESIGN NOTES

1. Concrete: 4,000 psi @ 28 days
2. Meets or Exceeds State DEQ and Local Requirements
3. 1-Piece Construction with Mastic Sealant - ASTM C990
4. Tank Requires PVC Tee on Inlet and Effluent Filter at Outlet

SCALE: 1/2" = 1'-0"